

23 DEC 2004

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number
WO 2004/007959 A1

(51) International Patent Classification⁷: **F04B 35/04**

(74) Agents: ARNAUD, Antonio, M. P et al.; Rua José Bonifácio, 93 - 9th floor, 01003-901 São Paulo - SP (BR).

(21) International Application Number:
PCT/BR2003/000090

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 8 July 2003 (08.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PI 0202830-1 10 July 2002 (10.07.2002) BR

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): EMPRESA BRASILEIRA DE COMPRESSORES S/A EMBRACO [BR/BR]; Rua Rui Barbosa, 1020, 89219-901 JOINVILLE - SC (BR). PUFF, Rinaldo [BR/BR]; Rua Jaó, 280, 89220-160 JOINVILLE - SC (BR).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): BERWANGER, Egídio [BR/BR]; Estrada Blumenau, km 15, 89237-001 JOINVILLE - SC (BR). PUFF, Rinaldo [BR/BR]; Rua Jaó, 280, 89220-160 JOINVILLE - SC (BR).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RESONANT ARRANGEMENT FOR A LINEAR COMPRESSOR

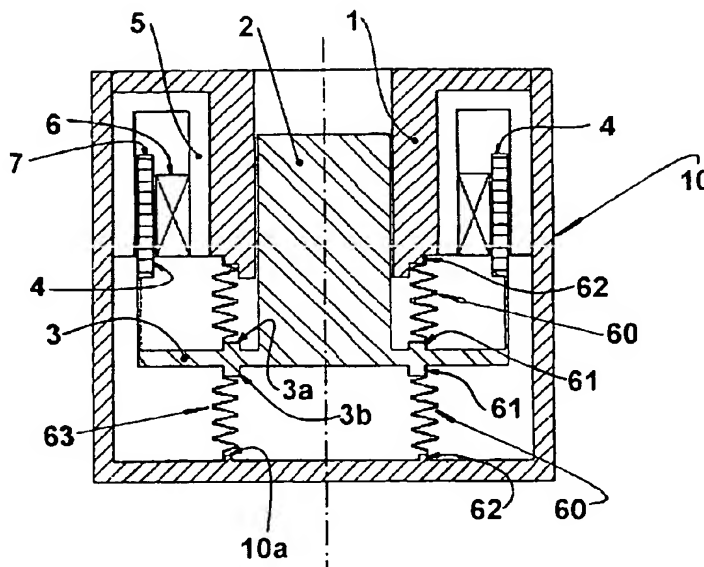

(57) Abstract: A resonant arrangement for a linear compressor, comprising a non-resonant assembly formed by a motor and a cylinder (1); a resonant assembly formed by a piston (2) reciprocating inside the cylinder (1); an actuating means (3) operatively coupling the piston (2) to the motor, and at least one spring means presenting an elongated tubular body (50) which is coaxial to the axis of the piston (2) and is operatively coupled to the actuating means (3) and to the non-resonant assembly, said tubular body (50) having at least part of the extension thereof folded in circumferential sectors (53), each circumferential sector (53) being elastically deformed in the axial direction upon displacement of the piston (2).

BEST AVAILABLE COPY

WO 2004/007959 A1

RESONANT ARRANGEMENT FOR A LINEAR COMPRESSOR

Field of the Invention

The present invention refers, in general, to a constructive arrangement for a resonant compressor of the type driven by a linear motor to be applied in refrigeration systems and which presents a piston reciprocating inside a cylinder.

Background of the Invention

In a reciprocating compressor driven by a linear motor, the gas suction and gas compression operations are performed by the reciprocating axial movements of the piston inside a cylinder, which is closed by a cylinder head and mounted within a hermetic shell, in the cylinder head being positioned the suction and discharge valves that control the admission and discharge of the gas in relation to the cylinder. The piston is driven by an actuating means that supports magnetic components driven by a linear motor affixed to the shell of the compressor.

In some constructions, the piston is mounted against a resonant spring means in the form of an assembly of flat springs, affixed to the hermetic shell of the compressor to operate as guides to the axial displacement of the piston and make the whole assembly act resonantly in a predetermined frequency, allowing the linear motor to be adequately dimensioned to continuously supply energy to the compressor upon operation.

The piston is mounted against the spring assembly through a flexible rod, said spring assembly is rigidly mounted against the cylinder, and the piston, the actuator, the magnetic component, the flexible rod, and the assembly of flat springs form together the resonant assembly of the compressor.

In this construction, the piston is mounted against an

assembly of flat springs made of a spring steel plate, through a flexible rod that has the function to neutralize the forces resulting from errors occurred during production and assembly of the parts, in order
5 not to transmit said forces in their totality to the piston, avoiding the wear of said piston in relation to the cylinder.

This construction presents some disadvantages, such as the need to have a flexible rod to neutralize the
10 forces resulting from the errors occurred during production and assembly of the parts. This flexible rod is also a relatively difficult component to be obtained, since it must be produced with special materials. Furthermore, such flat springs are very
15 expensive, as they require very sophisticated cutting and finishing processes.

In another known construction, the assembly of flat springs is replaced by a system of helical springs, in which a first helical spring is mounted between the
20 actuating means and the cylinder, and a second helical spring is mounted between the actuating means and the shell of the compressor and, in this construction, the resonant assembly of the compressor is formed by the piston, the actuating means, the magnet, and the
25 helical springs.

This construction also presents disadvantages, such as requiring a compressor with larger dimensions, as a function of the need to use a pair of helical springs, which cannot be properly affixed to be submitted to
30 traction forces.

Moreover, the helical springs have the characteristic of generating eccentric and shearing forces on the surfaces on which they are seated, provoking forces on the bearings of the piston of the compressor,
35 generating noise and wear and reducing the life of the

compressor.

Objects of the Invention

Thus, it is an object of the present invention to provide a resonant system for a linear compressor, presenting an easy and reliable assembly and fixation, which allows said resonant system to be submitted to traction and compressive forces during operation of the compressor, without losing the positioning in relation to the parts to which it is affixed, and which does not present radial and lateral force components during the movement of the piston that may result in radial forces to the piston.

A further object of the present invention is to provide a resonant system of low cost and which dispenses the use of the flexible rod and of the flat or helical springs.

Summary of the Invention

These and other objectives are achieved through a resonant arrangement for a linear compressor, comprising a non-resonant assembly formed by a motor and a cylinder; a resonant assembly formed by a piston reciprocating inside the cylinder; an actuating means operatively coupling the piston to the motor, and at least one spring means presenting an elongated tubular body, coaxial to the axis of the piston, and which is operatively coupled to the actuating means and to the non-resonant assembly, said tubular body having at least part of the extension thereof folded in circumferential sectors, each circumferential sector being elastically deformed in the axial direction upon the displacement of the piston.

Brief Description of the Drawings

The invention will be described below, with reference to the enclosed drawings, in which:

Figure 1 is a schematic longitudinal diametrical

sectional view of a hermetic compressor of the type driven by a linear motor and presenting a resonant means, constructed according to the prior art;

Figure 2 is a schematic longitudinal diametrical sectional view of a hermetic compressor of the type driven by a linear motor and presenting another construction for the resonant means of the prior art;

Figure 3 is a schematic longitudinal diametrical sectional view of a hermetic compressor of the type driven by a linear motor and presenting a resonant means constructed according to the present invention; Figure 4 illustrate, schematically, the compressor shown in figure 3, in a constructive variation of the present invention;

Figure 5 is a schematic lateral view of the resonant means of the present invention; and

Figure 6 is a schematic perspective view of the resonant means of the present invention illustrated in figure 5.

Description of the Illustrated Embodiments

The present invention will be described in relation to a reciprocating compressor driven by a linear motor of the type used in refrigeration systems and comprising a motor-compressor assembly, including a non-resonant assembly formed by a linear motor and a cylinder 1, and a resonant assembly formed by a piston 2 reciprocating inside the cylinder 1, and an actuating means 3, external to the cylinder 1 and carrying a magnet 4 that is axially impelled upon energization of the linear motor, said actuating means 3 operatively coupling the piston 2 to the linear motor.

According to the prior art construction illustrated in figures 1 and 2, the components mentioned above are mounted inside a hermetic shell 10.

As illustrated in the enclosed figures, the linear

motor is mounted around the cylinder 1 and the piston 2 and comprises a stack of internal laminations 5 with a coil 6 inserted therein, and a stack of external laminations 7.

5 In the construction illustrated in figures 1 and 2, the compressor also includes conventional resonant spring means, mounted in constant compression to the resonant assembly and to the non-resonant assembly, and which are elastically axially deformable in the
10 displacement direction of the piston 2.

In the construction of figure 1, the compressor comprises a spring means, in the form of an assembly of flat springs 10 made of a spring steel plate and to which is mounted the piston 2 through a flexible rod
15 8.

In the embodiment of figure 2, the compressor comprises a pair of spring means, for example a pair of helical springs 20, a first helical spring 20 mounted between the actuating means 3 and the cylinder
20 1, and a second helical spring 20 mounted between said actuating means 3 and the shell 10 of the compressor.

According to the illustrations, the cylinder 1 has an end closed by a valve plate 30, provided with a suction valve 31 and a discharge valve 32, which
25 allows the selective fluid communication between a compression chamber 9 defined between a top portion of the piston 2 and the valve plate 30 and respective internal portions of a cylinder head 40 that are respectively maintained in fluid communication with
30 the low and high pressure sides of the refrigeration system to which the compressor is coupled.

These constructions present the disadvantages discussed above.

According to the present invention, the prior art
35 disadvantages are avoided with a resonant arrangement

for a linear compressor that comprises at least one spring means presenting an elongated tubular body 50, which is coaxial to the axis of the piston 2 and has an end 51 operatively coupled to the actuating means 3, and an opposite end 52 operatively coupled to the non-resonant assembly, said tubular body 50 having at least part of its extension folded in circumferential sectors 53 that are symmetric in relation to the axis of said tubular body 50, and for example, orthogonal to the axis of the piston 2, each circumferential sector 53 being elastically deformed in the axial direction upon the displacement of piston 2.

According to a way of carrying out the present invention, the circumferential sectors 53 present the same cross section profile, for example a substantially "V" shaped profile, such as illustrated in figure 5, or a substantially "U" shaped profile.

In the construction illustrated in which the circumferential sector 53 has a "V" shaped profile, the elastic deformation of each said circumferential sector 53 upon displacement of the piston occurs by variation of its respective dihedral angle.

Although in the illustrated constructive alternative the circumferential sectors 53 present the same dihedral angle, it should be understood that the solutions in which the circumferential sectors 53 present different cross section profiles along the longitudinal extension of the tubular body 50 and different dihedral angles to said circumferential sectors 53 are also possible.

According to a way of carrying out the present invention, the tubular body is hollow, allowing for the fluid communication between the compression chamber 9 and the interior of the shell 10, which in this case is of the conventional hermetic type.

In the embodiment of the invention, as illustrated, the tubular body 50 presents a non-hollow lateral surface 54. In this case, since an end 51 of the tubular body 50 is hermetically affixed to the cylinder 1, and the opposite end 52 is hermetically affixed to the actuating means 3, said tubular body 50 blocks the fluid communication between the compression chamber 9 and the exterior of cylinder 1 through gaps existing between the piston 2 and the cylinder 1. In this construction, the shell of the compressor, if provided, does not need to be hermetic, since the sealing between the compression chamber 9 and the interior of said shell is obtained by the tubular body 50.

According to the illustration in figure 3, the compressor further presents another spring means in the form of a tubular body 50, having an end 51 affixed to the actuating means 3, and the other end 52 affixed to the shell 10. The fixation of each of the ends 51, 52 of each tubular body 50 to the respective parts defined by the cylinder 1, the actuating means 3, and the shell 10 is achieved for example, by one of the processes of welding, gluing or screwing.

In a form of executing the invention, each of the ends 51, 52 of each tubular body 50 is defined by a respective tubular extension not presenting the circumferential sectors 53 and which is dimensioned to provide a fitting to the respective part to which it is affixed. However, other constructive forms for said ends 51, 52 are possible, such as radial projections to be orthogonally affixed to the axis of the piston 2.

In the illustrated construction, each part to which is affixed an adjacent end 51, 52 of the tubular body 50 is provided with at least one circumferential tooth

that is coaxial to the axis of the piston 2 in order to fit said respective end 51, 52.

According to the illustrations in figure 3, a lower end portion of the cylinder 1 is provided with an annular cutting 1a, which defines the tooth for the fixation of an adjacent end 51 of the tubular body 50, and the actuating means 3 is provided with a first annular tooth 3a facing the cylinder 1 and securing the other end 52 of the tubular body 50.

10 In the construction presenting two spring means, such as illustrated in figure 4, the actuating means 3 is further provided with a second annular tooth 3b, facing a lower portion of the shell 10 in order to affix an end 51 of other tubular body 50. In this construction, the shell 10 presents a respective annular salience, which is coaxial and aligned in relation to the second tooth 3b of the actuating means 3 that secures the other end 52 of the tubular body 50. In the illustrated constructions, the circumferential teeth are continuous, coaxial and axially aligned to each other.

CLAIMS

1. A resonant arrangement for a linear compressor, comprising a non-resonant assembly formed by a motor and a cylinder (1); a resonant assembly formed by a piston (2) reciprocating inside the cylinder (1); an
5 actuating means (3) operatively coupling the piston (2) to the motor, and at least one spring means, mounted to the resonant assembly and which is elastically and axially deformed toward the
10 displacement of the piston (2), characterized in that the spring means presents an elongated tubular body (50), which is coaxial in relation to the axis of the piston (2) and has an end (51) operatively coupled to the actuating means (3) and an opposite end (52)
15 operatively coupled to the non-resonant assembly, said tubular body (50) having at least part of the extension thereof folded in circumferential sectors (53) that are symmetric in relation to the axis of said tubular body (50), each circumferential sector
20 (53) being elastically deformed in the axial direction upon displacement of the piston (2).
2. The resonant arrangement according to claim 1, characterized in that the circumferential sectors (53) present the same cross section profile.
- 25 3. The resonant arrangement according to claim 2, characterized in that each circumferential sector (53) presents a substantially "V" shaped profile, each circumferential sector (53) being elastically deformed by variation of its respective dihedral angle.
- 30 4. The resonant arrangement according to claim 3, characterized in that the circumferential sectors (53) present the same dihedral angle.
5. The resonant arrangement according to claim 1, characterized in that the circumferential sectors (53)
35 are orthogonal to the longitudinal axis of the tubular

body (50).

6. The resonant arrangement according to claim 1, characterized in that the tubular body (50) presents a non-hollow lateral surface (54).
- 5 7. The resonant arrangement according to claim 1, characterized in that the fixation of each end (51, 52) to the adjacent part defined by the cylinder (1) and the actuating means (3) is obtained by one of the processes of welding, gluing and screwing.
- 10 8. The resonant arrangement according to claim 7, characterized in that each one of the ends (51, 52) of the tubular body (50) is defined by a respective tubular extension not presenting the circumferential sectors (53) and dimensioned to provide a fitting to
- 15 the respective part to which it is affixed.
9. The resonant arrangement according to claim 8, characterized in that each part to which is affixed an adjacent end (51, 52) of the tubular body (50) is provided with at least one circumferential tooth (1a,
- 20 3a, 3b, 10a) which is coaxial to the axis of the piston (1) for fitting said respective end (51, 52).
10. The resonant arrangement according to claim 9, characterized in that each circumferential tooth (1a, 3a, 3b, 10a) is continuous.
- 25 11. The resonant arrangement according to claim 6, in which the cylinder (1) is closed by a cylinder head (30) defining between a top portion of the piston (2) and said cylinder head (30) a compression chamber (9), characterized in that the tubular body (50) has an end
- 30 (51) hermetically affixed to the cylinder (1) and the opposite end (52) hermetically affixed to the actuating means (3), in order to block the fluid communication between the compression chamber (9) and the exterior of the cylinder (1) through gaps existing
- 35 between the piston (2) and the cylinder (1).

12. The resonant arrangement according to claim 1, in which the hermetic compressor comprises a hermetic shell (10), inside which are mounted the resonant and the non-resonant assemblies, characterized in that it
- 5 comprises another spring means in the form of a tubular body (50) having an end (51) affixed to the actuating means (3) and the other end (52) affixed to the shell (10).

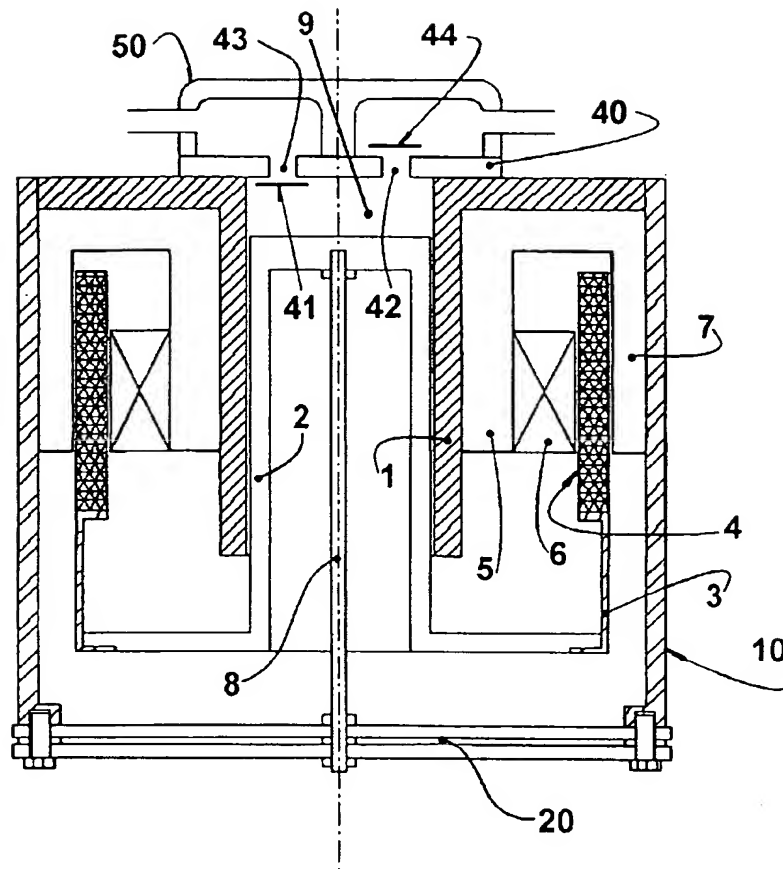
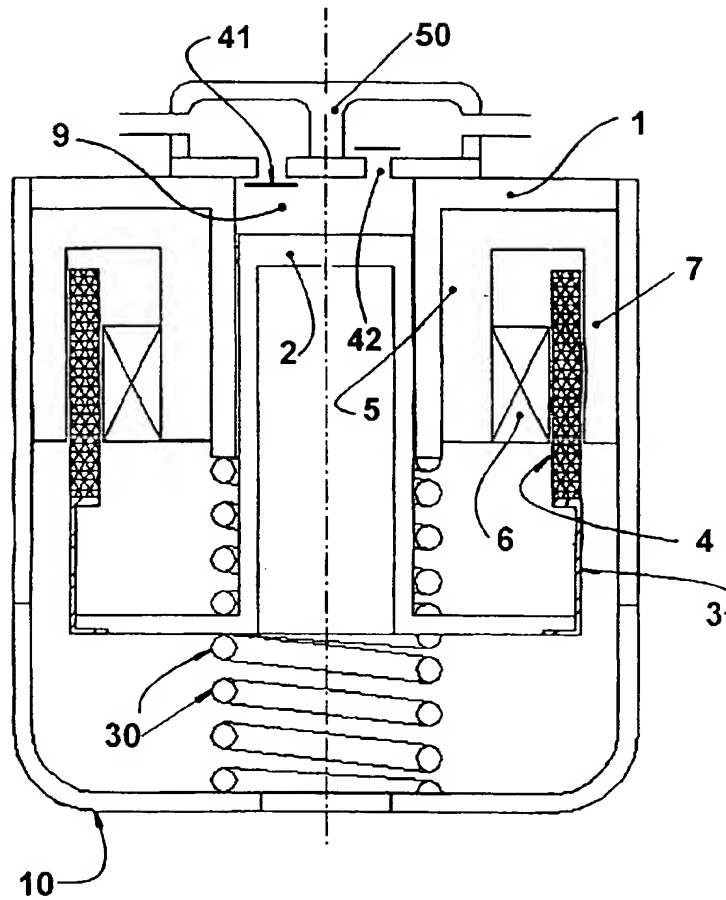


FIG. 1

BEST AVAILABLE COPY

**FIG. 2**

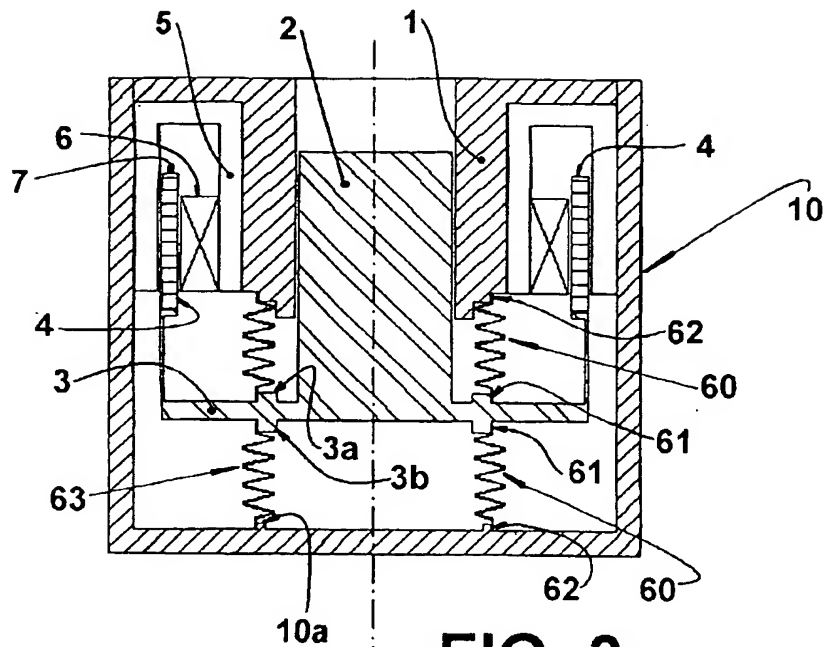


FIG. 3



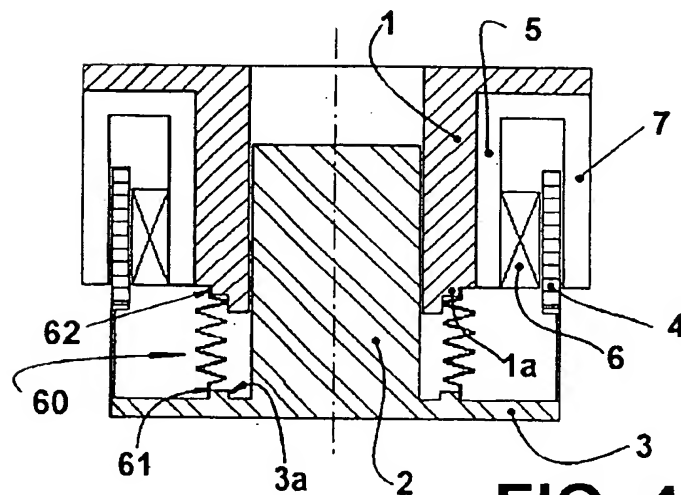


FIG. 4

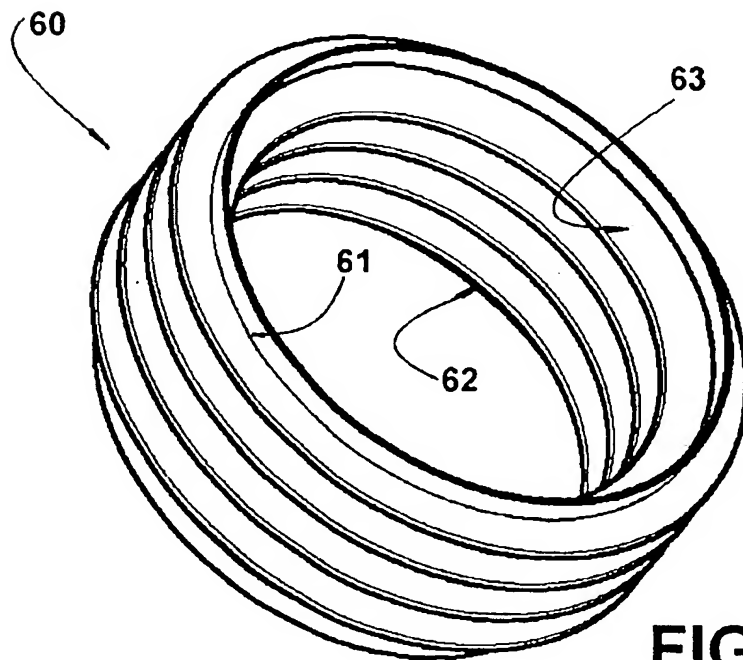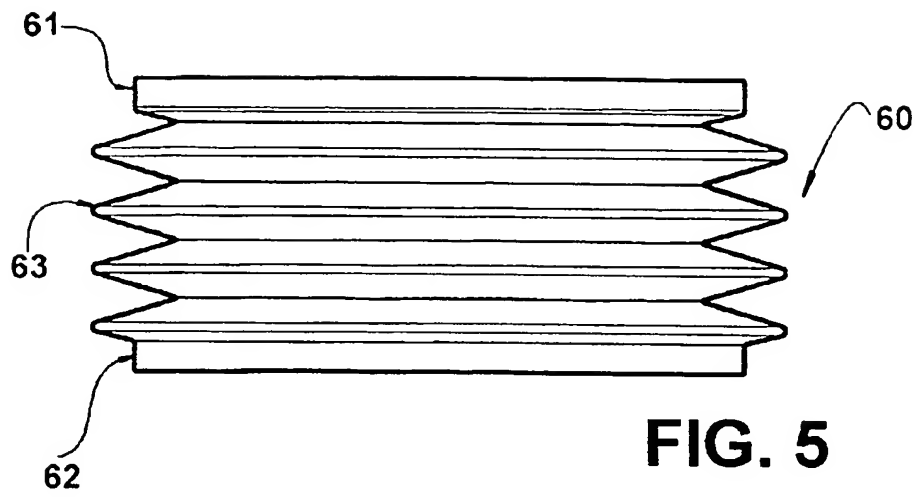

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 F04B35/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 F04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 909 895 A (MATSUSHITA REFRIGERATION) 21 April 1999 (1999-04-21) column 3, line 8 -column 4, line 25 figures 1,2	1-3,6,7, 12
A	EP 0 994 253 A (MATSUSHITA ELECTRIC IND CO LTD) 19 April 2000 (2000-04-19) page 1, paragraph 16 -page 2, paragraph 33 figures 4,5	1-3,7,12
A	US 2001/043870 A1 (SONG GYE YOUNG) 22 November 2001 (2001-11-22) column 5, line 31 -column 7, line 11 figures 1,5	1-3,7,12
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

23 September 2003

Date of mailing of the international search report

06/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Gnüchtel, F

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/BR 03/

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0909895	A	21-04-1999	JP 11117860 A	27-04-1999
			JP 11311178 A	09-11-1999
			CN 1214414 A ,B	21-04-1999
			DE 69810233 D1	30-01-2003
			DE 69810233 T2	30-04-2003
			EP 0909895 A2	21-04-1999
			ES 2189098 T3	01-07-2003
			TW 419567 B	21-01-2001
			US 6056519 A	02-05-2000
EP 0994253	A	19-04-2000	JP 2000120535 A	25-04-2000
			JP 2000161211 A	13-06-2000
			EP 0994253 A2	19-04-2000
			KR 2000029037 A	25-05-2000
			US 6273688 B1	14-08-2001
US 2001043870	A1	22-11-2001	KR 2001005812 A	29-11-2001
			BR 0100082 A	26-12-2001
			CN 1324986 A	05-12-2001
			DE 10100394 A1	22-11-2001
			JP 2001329953 A	30-11-2001
JP 2000291545	A	17-10-2000	NONE	